


APPROXIMATE QUANTITIES (THIS SHEET)

| ITEM | DESCRIPTION | QUANTITY | UNIT |
|------|---|----------|------|
| 1 | 2" CONFORM GRIND (AT BOTH ENDS OF PROJECT LIMITS) | 2,170 | SF |
| 2 | 2" X 6' WEDGE GRIND | 6,535 | SF |
| 3 | 2" HMA OVERLAY (1/2"AC) | 278 | TONS |
| 4 | LOCATE AND RAISE WATER VALVE BOX/LID (HMA OVERLAY) | 4 | EA |
| 5 | LOCATE AND RAISE MAN HOLE FRAME/COVER (HMA OVERLAY) | 1 | EA |
| 6 | LOCATE AND RAISE MONUMENT BOX/LID (HMA OVERLAY) | 1 | EA |
| 7 | 12" WHITE (LIMIT LINE) | 30 | LF |
| 8 | CALTRANS DETAIL 8 | 212 | LF |
| 9 | CALTRANS DETAIL 21 | 53 | LF |
| 10 | WHITE WORD MARKING "STOP" | 2 | EA |
| 11 | TWO-WAY BLUE HYDRANT REFLECTORS | 1 | EA |

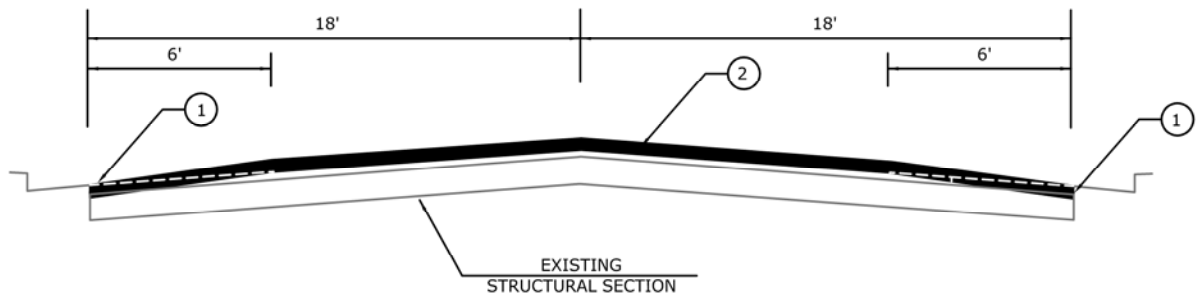

ORDER OF WORK: ① 2" X 6' WEDGE GRIND ② 2" HMA OVERLAY (1/2" AC)

SECTION "A-A"
FIFTH STREET LOOKING EAST
N.T.S.



NOTE:
ALL ASPHALT CONCRETE PAVEMENT PLACED AS THE FINAL LIFT / WEARING COURSE SHALL CONTAIN NO RAP (RECLAIMED ASPHALT PAVEMENT).



Public Works

Paving Detail E. 5th St. SEWER MAIN PROJECT

