

# City of Morgan Hill Magical Bridge Shade Structure Project

## General Notes:

1. Temporary Bench Mark – Based on a City approved benchmark as shown on these plans. Benchmark is located at the North East corner of the drain inlet as shown on these plans.
2. All existing elevations shall be field verified by contractor unless otherwise noted.
3. All survey monuments shall be installed at locations shown on the corresponding final map before acceptance of the subdivision.
4. Contractor shall not destroy existing permanent survey monuments.
5. All work shall conform to the latest edition of the City of Morgan Hill Standard Details for Construction which are hereby made a part of these plans. Deviations from the Standard Details must be approved by the City Engineer.
6. Developer shall arrange for a pre-construction meeting with the City Engineer (Municipal Code 17.32.250b) prior to commencing any construction. An encroachment permit shall be obtained from the Public Works Department upon completion of said meeting and prior to construction of any improvements within an existing or offered for dedication right-of-way, public utility easement or public service easement.
7. A grading permit shall be obtained from the city of Morgan Hill Building Division prior to any grading of building pads. Applicant for the grading permit shall provide a plan review letter from the Soils Engineer. A grading permit does not give contractor permission to commence off-site (street) grading. Only upon City approval of the improvement plans and completion of a pre-construction meeting, shall contractor commence off-site grading.
8. Contractor shall notify the Public Works Department 48 hours prior to commencement of any work phase. At that time, an "Inspection Request Form" shall be completed to ensure proper scheduling of an inspection with the City Engineer's Representative.
9. Contractor shall preserve all surrounding property by confining operations to within the "Limits of Work". Contractor shall be responsible for maintaining access for all adjoining residents, places of business, and properties at all times and in a safe manner. Contractor shall make proper notification at least 24 hours in advance of any interruption in access or service to the above property owners as well as to the City Engineer's Representative.
10. Contractor shall only use equipment provided with a spark arrestor device to reduce a potential fire hazard.

**Right of Modification**

11. Approval of this plan does not release Subdivider of the responsibility for correction of mistakes, errors, or omission, contained therein. If during the course of construction, public interest requires a modification of or a departure from these improvement plans or the City Standard Details for Construction, the City Engineer shall have the authority to require such modifications and departures and to specify the manner in which the same is to be made.

**Off-Site Water & Dust Control:**

12. Contractor shall provide a water truck onsite at all times. Contractor will be allowed to draw water from the City of Morgan Hill Water Distribution System only after obtaining a hydrant meter from the Public Works Department and an inspection of the water truck for a proper backflow device or "air-gap" filling pipe. Developer has paid for "off-site" construction water which shall not be used for building construction. Contractor shall keep down dust from construction activity to the maximum extent possible. Contractor shall clean all existing streets, curbs, gutters, and sidewalks affected by the project at the end of each working day.

**Material Storage:**  
13. No material shall be stored near the edge of pavement, traveled way, sidewalk, driveway, or shoulder line which may create a hazard for vehicular and pedestrian traffic.

**Trench Excavation:**

14. Contractor shall exercise diligence in reviewing the approved Soils Report and other available resources to familiarize himself/herself with the soil conditions to be encountered in the course of work identified in these plans. Contractor shall not cause damage to adjacent trees or existing structures above or below grade during trench excavation. All rocks, boulders, and large stones encountered shall be removed to provide a clearance of 6 inches around the pipe. The trench bottom shall be refilled to grade with sand, pea gravel, or other approved granular material. Clean 1/4" or 1/2" pea gravel shall be used in areas of moist condition, or where the soil has a history of sub-surface water. If the bottom of the trench is found to consist of wet or unstable material incapable of properly supporting the pipe, the material shall be removed to a minimum depth of 12 inches below the unstable layer for the full width of the trench and replaced with approved granular material. Trench excavation material deposited adjacent to the trench shall be placed and located to prevent spillage into the open trench.

**Trench Safety:**

15. It shall be Contractor's responsibility to provide all necessary trench safety measures for excavations. All trench safety measures shall be in accordance with the latest CALOSHA guidelines. Contractor shall provide evidence of a CAL-OSHA trenching permit at the pre-construction meeting.
16. Excavations within the public right-of-way shall be backfilled, compacted, and temporarily paved with cold mix "cut back" type A.C. to allow for vehicular and pedestrian traffic prior to 4:00 P.M. The use of trench plates is allowed, provided the Contractor covers all edges of the plates with cold mix material. It shall be the Contractor's responsibility to maintain on a daily basis, including weekends, the amount of material necessary to maintain the trench surface flush with the existing street or sidewalk. In addition, the Contractor shall respond to and correct shifting trench plates regardless of the time of day. If Contractor fails to correct sinking backfill material or shifting trench plates in a timely manner, City shall reserve the right to correct the problem and back charge the

**Joining Existing Pavement:**  
17. Existing pavement which is to be joined by new pavement shall be saw cut vertical to provide straight, true and neat joints. Overlapping of existing pavement without saw cutting or grinding shall not be permitted. The vertical edges shall be tacked prior to Terminals of all surfacing indicated on the plans shall join any existing surface in a smooth butt joint. Conform paving by method of abrasive grinding will be allowed upon approval of the City Engineer.

**Sanitary Sewers:**

18. All manholes, sewer mains, and laterals must pass a leakage test as described in the City of Morgan Hill Standard Details for Construction. After all backfill, testing, and pavement restoration has been completed, the contractor shall flush and clean all sewer lines 24 inches or less in diameter by the "Wayne Ball Method". After the leakage test, but prior to paving, a television inspection shall be performed at all locations of newly installed sewer mains at contractor's expense. The underground contractor must keep an accurate record of manholes and the distance between them and each wye branch lateral, and their direction.
19. Before any upstream sewers are constructed, the contractor shall verify the elevation and location of existing sewer lines to be connected.
20. The end of each new lateral shall be marked as shown in Detail S-2. The concrete contractor shall stamp an "S" on the face of each curb stone at the lateral end.

**Water Lines:**

21. Contractor shall not turn off or on any valves belonging to the City's water system. Only Department of Public Works personnel shall open the necessary valves to connect new lines. Failure to follow this requirement shall be considered an "unlawful connection" and may result in issuing of a citation and fines as specified in Section 13.04 of the Morgan Hill Municipal Code.
22. Connections requiring shut down of the system shall be done between the hours of 10:00 PM and 6:00 AM, and only upon coordination with the Engineering & Utilities Department.
23. All water lines shall be tested after completion of the trench backfill and compaction of the final base material, but prior to placement of the final roadway surface.
24. Contractor shall place marker posts adjacent to all air relief valves and blow off assemblies along water mains located in unimproved areas or fields. The posts shall be pressure treated redwood 4"x4"x6', painted white, buried 2'-6", and inscribed with "W/A.V." (for air relief valves) or "B.O." (for blow off assemblies), in 3 inch high carved letters painted blue.

25. The concrete contractor shall stamp a letter "W" on the face of curb directly above the water service.

**Backfill & Compaction:**

26. Backfill material shall be hand placed and compacted up to at least 6" above the pipe. When using native soil as trench backfill, the minimum sand cover shall be 12".

27. Jetting and/or flooding of trench backfill material will be permitted only if approved by the Soils Engineer and City Engineer.

28. Any excess excavation material may be deposited onsite in areas and at depths designated by the Owner, and with approval of the City Engineer.

29. The minimum relative compaction for trench backfill, subgrade and base material shall be 95% throughout the project unless recommended otherwise in the soils Report and approved by the City Engineer.

30. If trench backfill material is 100% sand, the City shall conduct compaction tests of the lifts specified. If the trench backfill material is native soil, contractor shall provide compaction test results of the lifts specified in the Soils Report to the City Engineer from a certified testing laboratory at contractor's expense.

31. Any aggregate base that becomes contaminated during construction shall be removed and replaced with

**Erosion and Sediment Control:**

32. An erosion and sediment control plan shall be required prior to any physical development of a property. Erosion control shall be planned between October 15th and May 1st, and sediment control shall be planned year round for the life of the project. Said plans shall meet the minimum standards and specifications of the California Stormwater Quality Association (CASQA) for Stormwater Best Management Practices (BMPs). Contractor shall be responsible for initiating the required control measures. CASQA BMP information can be viewed and downloaded at <http://www.casqa.org/Stormwater/>.

**Curb Inlet Stenciling:**  
33. All curb inlets shall have thermoplastic stenciling: "No Dumping, Flows to Creek/River".

**Eletroliers:**

34. All electroliers shall be installed by the Developer (rate schedule LS-2C, 120V, high pressure sodium, at the locations shown on these plans). See Electrical Section of the Standard Details.

This detailed architectural site plan illustrates the layout of the Reichstag dome and its surroundings. The central feature is the dome's internal structure, including the spiral walkways and the glass and steel framework. The plan shows various sections of the dome's interior and the surrounding ground floor areas, which contain offices, visitor facilities, and a restaurant. The exterior is defined by a circular colonnade. The plan includes a grid system for precise location marking. Several sections of the structure are highlighted in light green, and specific points of interest are marked with small icons. Numerous labels and dimensions are present, such as '43° 7"', '42° 5"', '24° 3"', '44° 6"', '43° 8"', '43° 9"', '23° 4"', '20° 9"', '22° 9"', and '33° 10''.




# Vicinity Map

# Community Park

## Magical Bridge Shade Structure Project

 <p><b>City of Morgan Hill</b> Engineering &amp; Utilities</p>		DRAWN		DESIGN	AEV	HOR	NTS
		CHECKED	AEV	DATE	11/26/2024	VERT	NTS
<p>17575 PEAK AVE. MORGAN HILL, CA 95037</p> <p>(408) 776-6480 FAX (408) 779-7236</p> <p>CITY OF MORGAN HILL</p> <p>REVISIONS</p>		APPROVED	DATE	11/25/2024	DATE	11/25/2024	
<p>CITY FILE NO. 0000</p> <p>PLAN SET 0000</p> <p>Sheet 1 OF 1</p>		NO.	DESCRIPTION	BY	<p>Scott C. Creer RCE 58879</p> <p>CITY ENGINEER EXP. DATE 06-30-2025</p>		
		####	####	####	####	####	####

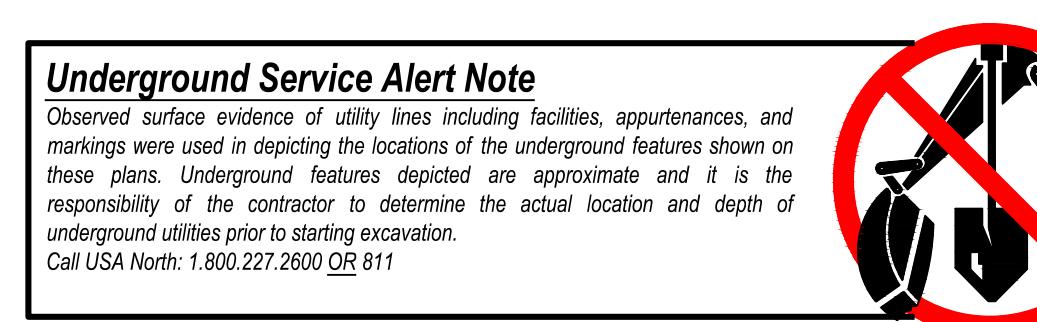

#### **Underground Service Al**

**Underground Service Alert Note**  
Observed surface evidence of utility lines including facilities, appu markings were used in depicting the locations of the underground fea these plans. Underground features depicted are approximate responsibility of the contractor to determine the actual location underground utilities prior to starting excavation.

Ne

**Note:** Contractor agrees that they shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the contractor shall defend, indemnify and hold the City of Morgan Hill harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting for liability arising from sole negligence of the City of Morgan Hill.

Legend		
Description	Existing	Proposed
Storm Drain	— (sd) —	— SD —
Underground Electric	— (e) —	— E —